


Fast locking device solution for suspension of a variety of services, designed with an innovative side release mechanism.

FEATURES / BENEFITS

- Versatile hanger that is ideal for signage, lighting, mechanical and electrical applications
- Up to 6 times faster to install than traditional hanging systems
- Ergonomic side release functionality allows for rapid adjustment
- Discreet and aesthetic design
- Supplied as a ready to use kit with a versatile loop end fixing




INSTALLATION & ADJUSTMENT

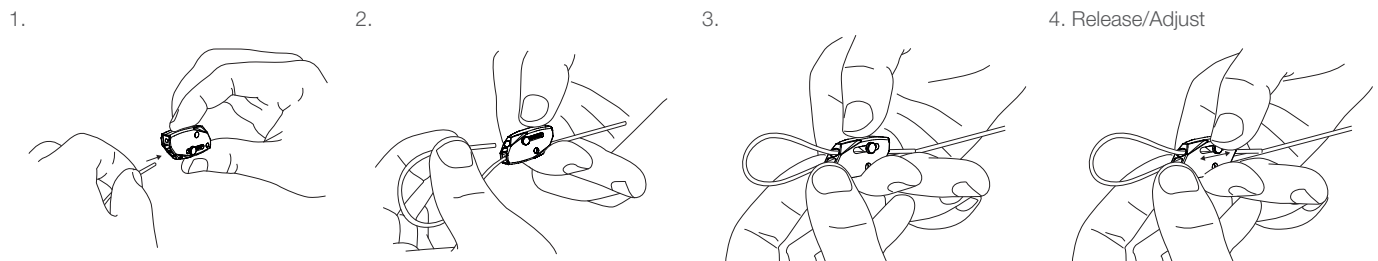

Ensure a minimum 75 mm of tail wire exit the hanger.

SPECIFICATION

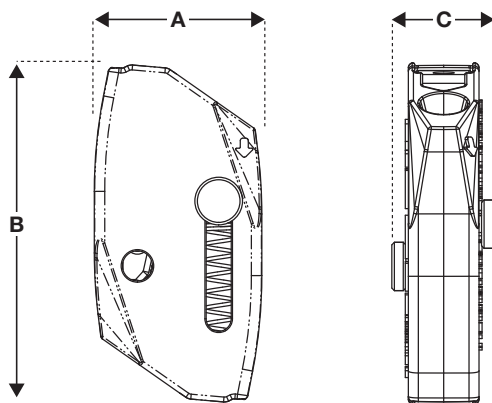

Dimension	No.2 (mm)
A	17
B	34
C	10

AVAILABLE WITH A LOOP END FIXING



For more technical information contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Safe Working Load:

- 1,5 mm / 35 kg @ 3:1
- 2,0 mm / 60 kg @ 3:1
- 2,5 mm / 70 kg @ 3:1

Material:

Housing - Type ZA2 Zinc
 Button - Brass (5 µm Nickel Plated)
 Wedge - Sintered steel hardened to min. 56 Rockwell C
 Spring - Stainless Steel (Type 302)
 End Cap - UV stabilised homopolymer popylene