



### G Model - Micrometer Adjustable (Click) Torque Wrench

- All steel construction, superb durability.
- Permanently stamped major and minor scales for precision torque values setting.
- Convenient Metric or English major scale with English or Metric secondary scale.
- +/-4% Accuracy in clockwise direction from 20% to 100% Max.Torque.
- Pull/push to unlock/lock the locking ring to setting torque.
- Grooved non-slip grip fits comfortably in your hand.
- Various kinds of heads designed for different applications:
  - GM / G model: Fine-tooth ratchets suitable for operation in confined spaces requiring only 8 degrees swing.
  - GMH / GH model: Head holder for standard 9x12 and 14x18mm rectangular shank heads.
  - GMR model: Round head holders for  $\Phi 16$ ,  $\Phi 22$ mm heads.



Clear Scale




1

Pull and hold the locking ring



2

Rotate the locking ring to adjust the torque by the other hand



3

Release the locking ring after torque being set

### 100% Calibrated

Unique serial number for each torque wrench, corresponding to the certificate of calibration



### Shockproof packaging

Specially designed for all series of "NovaTork" torque products




**GM**

### Reversible Ratchet Head G Torque Wrench

Bi-direction operation, 8 degrees swing, suitable for confined space

**G** (English unit)

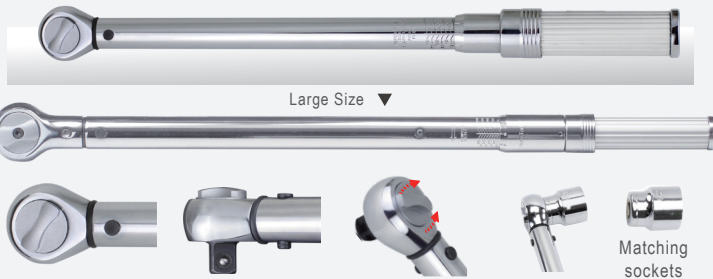

(Metric)

Item No.	Square Drive	Torque Range		Increment	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
GM112	1/4"	2.5-12	20-105*	0.05	290	38	0.68
GM120	1/4"	4.0-20	30-180*	0.1	290	38	0.68
GM230	3/8"	6.0-30	50-250*	0.1	318	38	0.82
GM330	1/2"	6.0-30	50-250*	0.1	318	38	0.82
GM260	3/8"	10-60	9-45	0.25	388	38	0.96
GM360	1/2"	10-60	9-45	0.25	388	38	0.96
GM2100	3/8"	20-100	15-75	0.5	443	38	1.04
GM3100	1/2"	20-100	15-75	0.5	443	38	1.04
GM2125	3/8"	25-125	20-90	0.5	443	38	1.04
GM3125	1/2"	25-125	20-90	0.5	443	38	1.04
GM3200	1/2"	40-200	30-150	1	468	40	1.16
GM3335	1/2"	65-335	50-250	1	528	40	1.3
GM4335	3/4"	65-335	50-250	1	528	40	1.34
GM4500	3/4"	100-500	80-400	2.5	855	60	5
GM4800	3/4"	160-800	120-600	4	1055	60	5.9
GM5800	1"	160-800	120-600	4	1055	60	5.9
GM41000	3/4"	200-1000	150-750	5	1055	60	5.9
GM51000	1"	200-1000	150-750	5	1055	60	5.9
GM51500	1"	300-1500	200-1100	5	1260	75	9.2
GM52000	1"	400-2000	300-1500	10	1260	75	9.2
GM53000	1"	600-3000	400-2000	15	1260	75	10.5
GM3200L	1/2"	40-200	30-150	1	525	40	1.29
GM3335L	1/2"	65-335	50-250	1	700	40	2.1
GM4335L	3/4"	65-335	50-250	1	700	40	2.15
GM51500L	1"	300-1500	200-1100	5	1600	75	13
GM52000L	1"	400-2000	300-1500	10	1600	75	13
GM53000L	1"	600-3000	400-2000	15	1840	75	15.2
GM4400S	3/4"	80-400	60-300	2	710	57	3
GM4500S	3/4"	100-500	80-400	2.5	710	57	3

\*Unit is Lb.in; L is extended length version; S is shorten length version.

(English)

Item No.	Square Drive	Torque Range		Increment	Length mm	Width mm	Weight kg
		Lb.ft	N.m				
G1200	1/4"	40-200*	4.0-22	1.0*	280	38	0.68
G2250	3/8"	50-250*	6.0-30	1.0*	315	38	0.82
G2100	3/8"	20-100	25-135	0.5	425	38	1.04
G3100	1/2"	20-100	25-135	0.5	425	38	1.04
G3150	1/2"	30-150	40-200	0.5	505	40	1.16
G3250	1/2"	50-250	70-340	1	525	40	1.3
G4250	3/4"	50-250	70-340	1	525	40	1.34
G4400	3/4"	80-400	100-550	2	855	60	5
G4600	3/4"	100-600	150-800	2.5	1055	60	5.9
G5600	1"	100-600	150-800	2.5	1055	60	5.9
G51000	1"	200-1000	250-1350	5	1260	75	9.2
G52000	1"	400-2000	500-2700	10	1260	75	10.5
G3250L	1/2"	50-250	70-340	1	705	40	2.1
G4250L	3/4"	50-250	70-340	1	705	40	2.15

\*Unit is Lb.in; L is extended length version.

**GMH**

### Rectangular Shank Head G Torque Wrench

for 9x12, 14x18, 24x32, 27x36mm rectangular shank head inserts

**GH** (English unit)



(Metric)

Item No.	Shank Size mm	Torque Range		Increment	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
GMH912	9x12	2.5-12	20-105*	0.05	287	38	0.58
GMH920	9x12	4.0-20	30-180*	0.1	287	38	0.58
GMH930	9x12	6.0-30	50-250*	0.1	306	38	0.72
GMH960	9x12	10-60	9-45	0.25	375	38	0.86
GMH9100	9x12	20-100	15-75	0.5	430	38	0.94
GMH9125	9x12	25-125	20-90	0.5	430	38	0.94
GMH14200	14x18	40-200	30-150	1	467	38	1.06
GMH14335	14x18	65-335	50-250	1	527	38	1.2
GMH14400	14x18	80-400	60-300	2	697	35	2
GMH24500	24x32	100-500	80-400	2.5	855	56	5
GMH24800	24x32	160-800	120-600	4	1055	56	5.9
GMH241000	24x32	200-1000	150-750	5	1055	56	5.9
GMH271500	27x36	300-1500	200-1100	5	1249	64	9
GMH272000	27x36	400-2000	300-1500	10	1249	64	9
GMH273000	27x36	600-3000	400-2000	15	1249	64	10.3
GMH14335L	14x18	65-335	50-250	1	700	38	2
GMH24400S	24x32	80-400	60-300	2	710	56	2.8
GMH24500S	24x32	100-500	80-400	2.5	710	56	3

\*Unit is Lb.in; L is extended length version; S is shorten length version.

(English)

Item No.	Shank Size mm	Torque Range		Increment	Length mm	Width mm	Weight kg
		Lb.ft	N.m				
GH9200	9x12	40-200*	4.0-22	1*	268	38	0.58
GH9250	9x12	50-250*	6.0-30	1*	303	38	0.72
GH9100	9x12	20-100	25-135	0.5	413	38	0.94
GH14150	14x18	30-150	40-200	0.5	507	38	1.06
GH14250	14x18	50-250	70-340	1	527	38	1.2
GH24400	24x32	80-400	100-550	2	855	56	5
GH24600	24x32	100-600	150-800	2.5	1055	56	5.9
GH271000	27x36	200-1000	250-1350	5	1260	64	9
GH272000	27x36	400-2000	500-2700	10	1260	64	10.3

\*Unit is Lb.in

### GMR

Round Head Holder G Torque Wrench  
for  $\Phi 16$ ,  $\Phi 22$ mm round hole inserts



(Metric)

Item No.	Round hole mm	Torque Range		Increment N.m	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
GMRI 612	$\Phi 16$	2.5-12	20-105*	0.05	288	38	0.58
GMRI 620	$\Phi 16$	4.0-20	30-180*	0.1	288	38	0.58
GMRI 630	$\Phi 16$	6.0-30	50-250*	0.1	307	38	0.72
GMRI 660	$\Phi 16$	10-60	9-45	0.25	377	38	0.86
GMRI 6125	$\Phi 16$	25-125	20-90	0.5	431	38	0.94
GMRI 6200	$\Phi 16$	40-200	30-150	1	455	38	1.06
GMRI 6335	$\Phi 16$	65-335	50-250	1	515	38	1.2
GMRI 6400	$\Phi 16$	80-400	60-300	2	695	38	2
GMR22500	$\Phi 22$	100-500	80-400	2.5	800	38	4.3
GMR22800	$\Phi 22$	160-800	120-600	4	1005	38	5.2
GMR221000	$\Phi 22$	200-1000	150-750	5	1005	38	5.2
GMRI 6335L	$\Phi 16$	65-335	50-250	1	695	38	2

\*Unit is Lb.in; L is extended length version

【 For English unit, please contact the manufacturer 】



With Extension (Model \_E)

### GM\_E

Reversible Ratchet Head G Torque Wrench  
With Extension



(Metric)

Item No.	Square Drive	Torque Range		Increment N.m	Length mm	Width mm	Weight kg	Extension
		N.m	Lb.ft					
GM51500E	1"	300-1500	200-1100	5	2200	75	12.10	1
GM52000E	1"	400-2000	300-1500	10	2200	75	12.10	1
GM53000E	1"	600-3000	400-2000	15	2780	75	15.50	1

### GMH\_E

Rectangular Shank Head G Torque Wrench  
With Extension



(Metric)

Item No.	Shank Size mm	Torque Range		Increment N.m	Length mm	Width mm	Weight kg	Extension
		N.m	Lb.ft					
GMH271500E	27x36	300-1500	200-1100	5	2200	64	12.50	1
GMH272000E	27x36	400-2000	300-1500	10	2200	64	12.50	1
GMH273000E	27x36	600-3000	400-2000	15	2780	64	15.30	1

Note: Due to the product improvement, the technical parameters are subject to variation, please refer to the actual production from the factory.